


FIG 502 - GATE VALVE FULL BORE

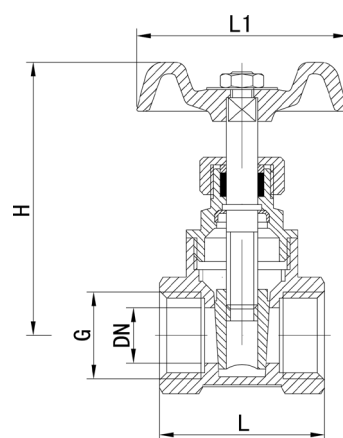

SIZE RANGE

ITEM CODE	BSP	METRIC mm
502/0015	½"	15
502/0020	¾"	20
502/0025	1"	25
502/0032	1¼"	32
502/0040	1½"	40
502/0050	2"	50
502/0065	2½"	65
502/0080	3"	80
502/0100	4"	100

CONSTRUCTION

DESCRIPTION	MATERIAL
Body	Brass
Bonnet	Brass
Wedge	Brass
Gland Nut	Brass
Stem	Brass
Stem Packing	P.T.F.E
Handle Wheel	Cast Iron

DIMENSIONS

G	DN	L	L1	H
½"	13.5	40	54	69
¾"	17	43	54	72
1"	23	44	60	95
1¼"	31	49	73	110
1½"	38.5	55.5	73	115
2"	44	60	78	135
2½"	60	62	100	165
3"	70	70	112	180
4"	89	78	142	220

TECHNICAL DATA:

Maximum Working Pressure:

180PSI (12.5 Bar)

Temperature rating:

-20°C to 100°C

Suitable Applications:

Water, Oil, Gas

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards
PEACE OF MIND ensured by visible branding on each product
PROVEN DURABILITY through robust construction