


FIG 440 - SS TWO PIECE BALL VALVE

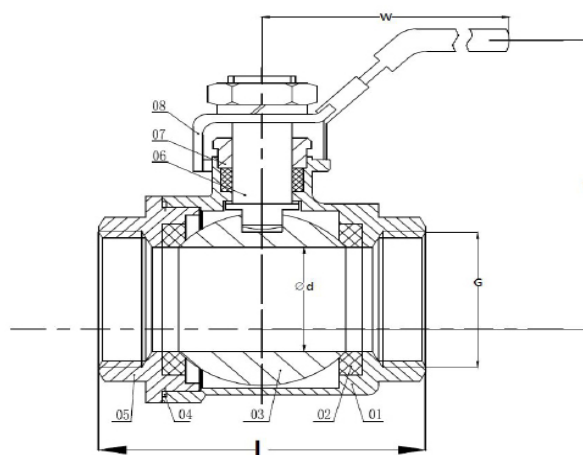

SIZE RANGE

ITEM CODE	BSP	METRIC mm
440/0015	½"	15
440/0020	¾"	20
440/0025	1"	25
440/0032	1¼"	32
440/0040	1½"	40
440/0050	2"	50

CONSTRUCTION

DESCRIPTION	MATERIAL
Body	316 Stainless Steel
Bonnet	316 Stainless Steel
Ball	316 Stainless Steel
Stem	316 Stainless Steel
Packing Ring	PTFE
Handle	SS + PVC
Seat	PTFE
Gasket	PTFE

DIMENSIONS

BSP	L	D	G	H	W
½"	54.5	15	BSP/BSPT	54	102
¾"	60	20	BSP/BSPT	57	107
1"	73.5	25	BSP/BSPT	72	125
1¼"	83.5	32	BSP/BSPT	75	125
1½"	93	38	BSP/BSPT	92	165
2"	107	49	BSP/BSPT	94	170

TECHNICAL DATA:

Maximum Working Pressure:	360PSI (25 Bar)
Temperature rating:	-20°C to 180°C
Suitable Applications:	Water, Oil, Gas

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards
PEACE OF MIND ensured by visible branding on each product
PROVEN DURABILITY through robust construction