


FIG 441 - SS THREE PIECE BALL VALVE

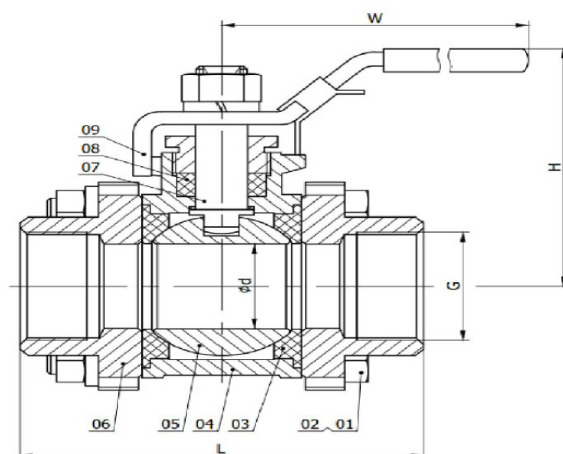

SIZE RANGE

ITEM CODE	BSP	METRIC mm
441/0008	1/4"	8
441/0010	3/8"	10
441/0015	1/2"	15
441/0020	3/4"	20
441/0025	1"	25
441/0032	1 1/4"	32
441/0040	1 1/2"	40
441/0050	2"	50

CONSTRUCTION

DESCRIPTION	MATERIAL
Body	316 Stainless Steel
Bonnet	316 Stainless Steel
Ball	316 Stainless Steel
Stem	316 Stainless Steel
Packing Ring	PTFE
Handle	SS + PVC
Seat	PTFE
Bolts & Nuts	316 Stainless Steel

DIMENSIONS

BSP	L	D	G	H	W
1/4"	67	12	BSP/BSPT	48	90
3/8"	65	12	BSP/BSPT	48	90
1/2"	63	15	BSP/BSPT	52	102
3/4"	71	20	BSP/BSPT	54	102
1"	80	25	BSP/BSPT	68	125
1 1/4"	94	32	BSP/BSPT	78	140
1 1/2"	104	38	BSP/BSPT	84	160
2"	124	49	BSP/BSPT	95	170

TECHNICAL DATA:

Maximum Working Pressure:

360PSI (25 Bar)

Temperature rating:

-20°C to 180°C

Suitable Applications:

Water, Oil, Gas

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards

PEACE OF MIND ensured by visible branding on each product

PROVEN DURABILITY through robust construction