


## FIG 452 - SS SOCKET

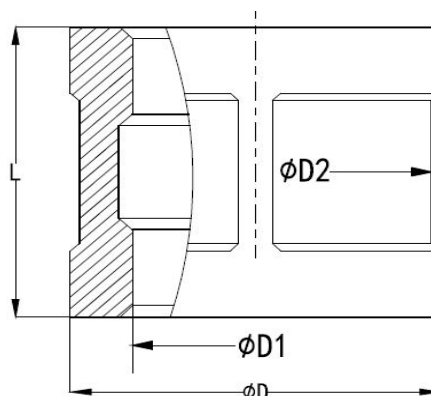

| SIZE RANGE |     |           |
|------------|-----|-----------|
| ITEM CODE  | BSP | METRIC mm |
| 452/0008   | ¼"  | 8         |
| 452/0010   | ⅜"  | 10        |
| 452/0015   | ½"  | 15        |
| 452/0020   | ¾"  | 20        |
| 452/0025   | 1"  | 25        |
| 452/0032   | 1¼" | 32        |
| 452/0040   | 1½" | 40        |
| 452/0050   | 2"  | 50        |

| DIMENSIONS |      |      |      |      |
|------------|------|------|------|------|
| BSP        | L    | D    | D1   | D2   |
| ¼"         | 25   | 17.5 | 11.6 | 15.6 |
| ⅜"         | 30   | 21   | 15   | 19   |
| ½"         | 35   | 27.5 | 17.5 | 25.7 |
| ¾"         | 38.5 | 32   | 23.8 | 30   |
| 1"         | 43   | 39.5 | 29.4 | 37.5 |
| 1¼"        | 49   | 49.5 | 38   | 47.5 |
| 1½"        | 53   | 55.5 | 44   | 53.5 |
| 2"         | 65   | 68   | 56   | 66   |

### TECHNICAL DATA:

Maximum Working Pressure: 232PSI (16 Bar)

Temperature rating: -20°C to 180°C

Suitable Applications: Water, Oil, Gas

**PERFECT SEALS** as threads conform to BSPT-21 (ISO-7) standards

**PEACE OF MIND** ensured by visible branding on each product

**PROVEN DURABILITY** through robust construction