


FIG 462 - SS HEX PLUG

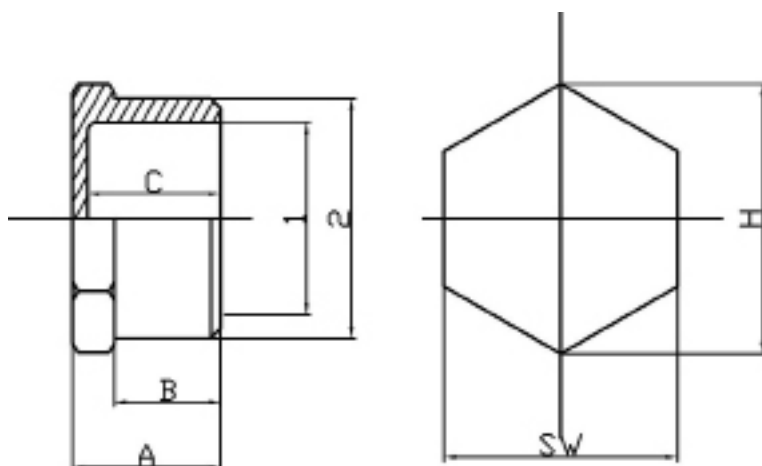

SIZE RANGE		
ITEM CODE	BSP	METRIC mm
462/0008	¼"	8
462/0010	⅜"	10
462/0015	½"	15
462/0020	¾"	20
462/0025	1"	25
462/0032	1¼"	32
462/0040	1½"	40
462/0050	2"	50

DIMENSIONS							
BSP	A	B	C	1	2	SW	H
¼"	17	11.8	15	8.6	14.3	15	17
⅜"	18.7	12.7	16.5	11.2	17.4	18.3	20.8
½"	20.8	14.8	17.3	15.3	21.6	22.3	26.3
¾"	25	17	23.2	20.2	27.2	28	32.1
1"	26.8	18.7	2	26.4	34	36.2	38.9
1¼"	30.5	22	28.7	35	43	44.2	47.8
1½"	30.7	22	27.6	40.5	49	50	53.7
2"	34.3	25.5	30.5	51.7	60.6	62.9	67.6

TECHNICAL DATA:

Maximum Working Pressure: 232PSI (16 Bar)

Temperature rating: -20°C to 180°C

Suitable Applications: Water, Oil, Gas

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards

PEACE OF MIND ensured by visible branding on each product

PROVEN DURABILITY through robust construction