


FIG 465 - SS 90° ELBOW MXF

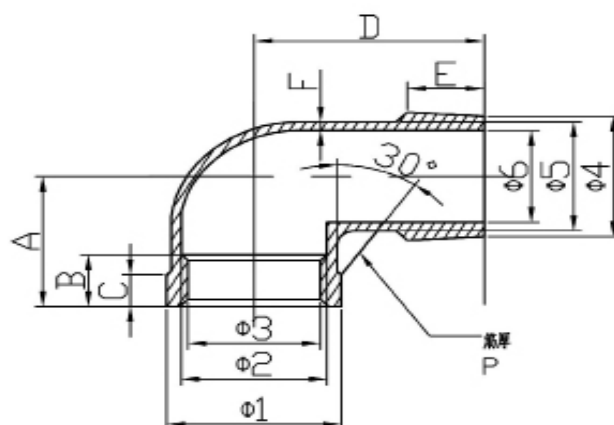

SIZE RANGE		
ITEM CODE	BSP	METRIC mm
465/0015	½"	15
465/0020	¾"	20
465/0025	1"	25
465/0032	1¼"	32
465/0040	1½"	40
465/0050	2"	50

DIMENSIONS													
BSP	A	B	C	D	E	F	P	1	2	3	4	5	6
½"	27.5	10	7.5	36.5	14.5	2	3	27.5	25.7	17.7	21.2	18.1	14
¾"	29.5	12	8	42	17	2.1	3	32.5	30.5	22.5	27.1	23.2	19
1"	37.3	15.5	11	52	18	2.3	3.5	40.5	38.5	28.5	33.8	30.7	25.6
1¼"	44	15	12	57	20.5	2.7	3.5	49.5	47	37.1	42.5	39	33.5
1½"	48	19	12.5	64.2	20.5	3	3.5	56	53.8	43.6	48.5	45	39
2"	56	18	13.5	73.5	24	3	4.5	68	65.5	55	60	56	50

TECHNICAL DATA:

Maximum Working Pressure:	232PSI (16 Bar)
Temperature rating:	-20°C to 180°C
Suitable Applications:	Water, Oil, Gas

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards
PEACE OF MIND ensured by visible branding on each product
PROVEN DURABILITY through robust construction