
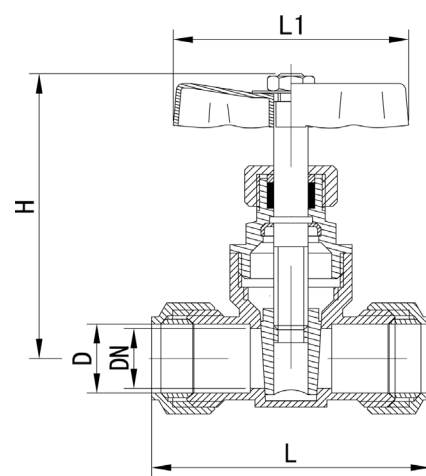


## FIG 503 - GATE VALVE CxC

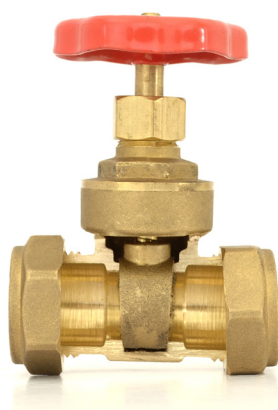

### SIZE RANGE

| ITEM CODE | METRIC mm |
|-----------|-----------|
| 503/0015  | 15        |
| 503/0022  | 22        |

### CONSTRUCTION

| DESCRIPTION  | MATERIAL  |
|--------------|-----------|
| Body         | Brass     |
| Bonnet       | Brass     |
| Wedge        | Brass     |
| Gland Nut    | Brass     |
| Stem         | Brass     |
| Stem Packing | P.T.F.E   |
| Handle       | Cast Iron |

### DIMENSIONS

| D    | DN | L  | L1 | H  |
|------|----|----|----|----|
| 15mm | 12 | 59 | 45 | 65 |
| 22mm | 19 | 70 | 50 | 74 |

### TECHNICAL DATA:

Maximum Working Pressure:

180PSI (12.5 Bar)

Temperature rating:

-20°C to 100°C

Suitable Applications:

Water, Oil, Gas

**PERFECT SEALS** as threads conform to BSPT-21 (ISO-7) standards  
**PEACE OF MIND** ensured by visible branding on each product  
**PROVEN DURABILITY** through robust construction