


FIG 504 - SWING CHECK VALVE

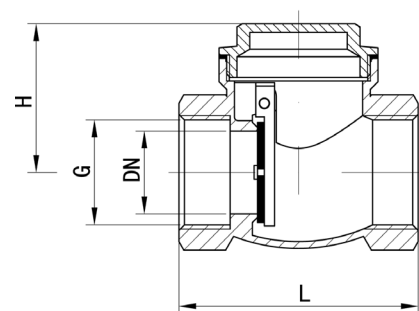

SIZE RANGE

ITEM CODE	BSP	METRIC mm
504/0015	½"	15
504/0020	¾"	20
504/0025	1"	25
504/0032	1¼"	32
504/0040	1½"	40
504/0050	2"	50
504/0065	2½"	65
504/0080	3"	80
504/0100	4"	100

CONSTRUCTION

DESCRIPTION	MATERIAL
Body	Brass
Swing Clack	Brass
Seat	NBR Rubber

DIMENSIONS

G	L	H	DN
½"	46.5	33.5	13
¾"	56	35	16.5
1"	62	43	22.5
1¼"	72	48	27
1½"	82	62	31
2"	97	65	41.5
2½"	121	76	57
3"	136	82	68
4"	163	101	91

TECHNICAL DATA:

Maximum Working Pressure:

180PSI (12.5 Bar)

Temperature rating:

0°C to 120°C

Suitable Applications:

Water, Oil

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards
PEACE OF MIND ensured by visible branding on each product
PROVEN DURABILITY through robust construction