
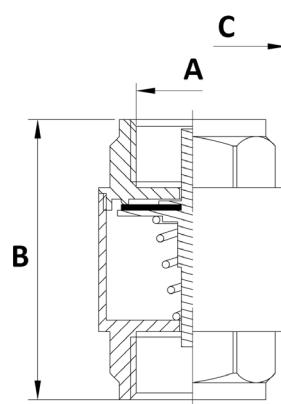


FIG 514 - SPRING LOADED CHECK VALVE



SIZE RANGE		
ITEM CODE	BSP	METRIC mm
514/0015	½"	15
514/0020	¾"	20
514/0025	1"	25
514/0032	1¼"	32
514/0040	1½"	40
514/0050	2"	50
514/0065	2½"	65
514/0080	3"	80
514/0100	4"	100

CONSTRUCTION	
DESCRIPTION	MATERIAL
Body	Brass
Clack	Brass
Seat	NBR Rubber
Spindle	Brass
Spring	Stainless Steel

DIMENSIONS		
A	B	C
½"	48	31
¾"	62	40
1"	72	47
1¼"	80	60
1½"	86	67
2"	92	83
2½"	105	98
3"	110	113
4"	118	145

TECHNICAL DATA:

Maximum Working Pressure:

230PSI (16 Bar)

Temperature rating:

0°C to 120°C

Suitable Applications:

Water, Oil

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards
PEACE OF MIND ensured by visible branding on each product
PROVEN DURABILITY through robust construction