


## FIG 516 - BIB TAP

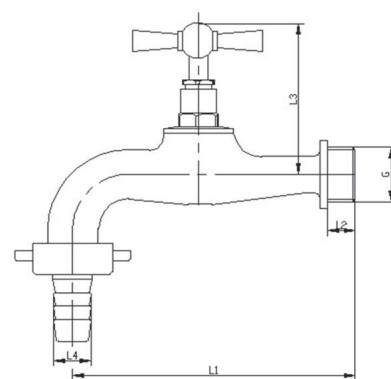

### SIZE RANGE

| ITEM CODE     | BSP     | METRIC mm |
|---------------|---------|-----------|
| 516/0015      | ½"      | 15        |
| 516/0015x0020 | ½" x ¾" | 20        |
| 516/0020      | ¾"      | 25        |
| 516/HPx0015   | ½"      | 32        |
| 516/HPx0020   | ¾"      | 40        |

### CONSTRUCTION

| DESCRIPTION | MATERIAL |
|-------------|----------|
| Body        | Brass    |
| Wedge       |          |
| Gland Nut   | Brass    |
| Stem        | Brass    |
| Handle      | Brass    |

### DIMENSIONS

| G       | L1  | L2   | L3 | L4   |
|---------|-----|------|----|------|
| ½"      | 86  | 10.5 | 60 | 14.5 |
| ½" x ¾" | 78  | 10.5 | 60 | 16.5 |
| ¾"      | 98  | 13   | 60 | 20   |
| ½"      | 106 | 13   | 63 | 15   |
| ¾"      | 108 | 13   | 63 | 20   |

### TECHNICAL DATA:

Maximum Working Pressure:

174PSI (12 Bar)

Temperature rating:

0°C to 120°C

Suitable Applications:

Water

**PERFECT SEALS** as threads conform to BSPT-21 (ISO-7) standards  
**PEACE OF MIND** ensured by visible branding on each product  
**PROVEN DURABILITY** through robust construction