


FIG 565 - BUTTERFLY VALVE DI DISC

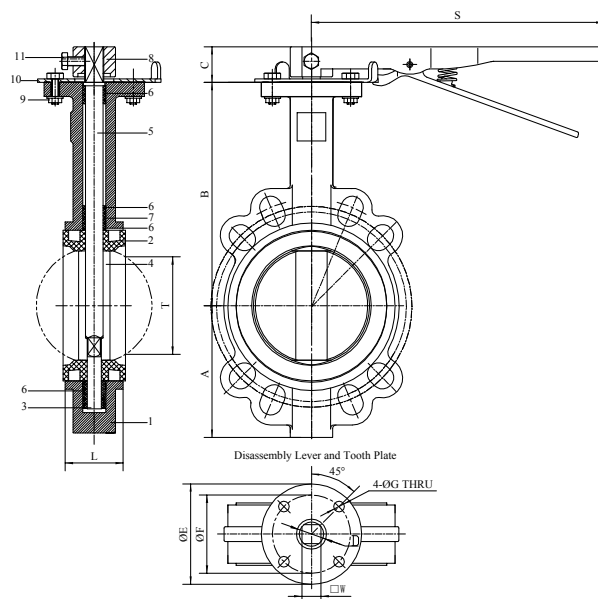

ITEM CODE	SIZE mm	SIZE RANGE										T
		A	B	C	D	E	F	G	L	W	S	
565/0050	50	85	162	30	12.7	65	50	7	42	10	220	32
565/0065	65	98	174	30	12.7	65	50	7	45	10	220	47
565/0080	80	104	181	30	12.7	65	50	7	45	10	220	65
565/0100	100	123	200	30	15.9	90	70	9.5	52	12	260	90
565/0125	125	136	213	30	19.1	90	70	9.5	54	14	260	111
565/0150	150	148	225	30	19.1	90	70	9.5	56	14	260	145
565/0200	200	186	260	38	22.2	125	102	11.5	60	17	358	193
565/0250	250	212	292	38	28.6	125	102	11.5	66	22	358	241
565/0300	300	251	337	38	31.8	125	102	11.5	77	24	358	292

CONSTRUCTION		
DESCRIPTION	MATERIAL	
1 Body	Cast Iron	
2 Seat	EPDM	
3 Lower Stem	C45	
4 Disc	Ductile Iron	
5 Upper Stem	C45	
6 Bushing	PTFE	
7 O-Ring	NBR, EPDM	
8 Lever	Malleable Cast Iron	
9 Bolt & Nut	Carbon Steel	
10 Locking Plate	Carbon Steel	
11 Screw	Carbon Steel	

TECHNICAL DATA:

Maximum Working Pressure: **230PSI (16 Bar)**

Temperature rating: **-40°C to 120°C**

Suitable Applications: **Water, Oil, Gas**