


FIG 450 - SS 90° ELBOW

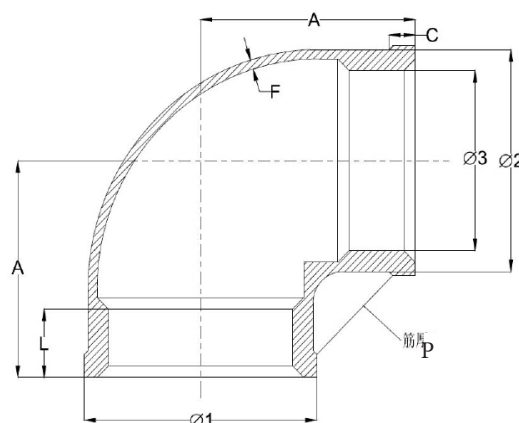

SIZE RANGE		
ITEM CODE	BSP	METRIC mm
450/0008	¼"	8
450/0010	⅜"	10
450/0015	½"	15
450/0020	¾"	20
450/0025	1"	25
450/0032	1¼"	32
450/0040	1½"	40
450/0050	2"	50

DIMENSIONS								
BSP	A	C	F	L	P	1	2	3
¼"	16.5	3	2.25	8	2	16	15.5	11
⅜"	19.5	3.5	2.25	8	2	20	19	14.5
½"	24	4	1.5	8.5	2	26	24.5	18
¾"	27	4.5	1.5	9.5	2	31.5	30	23
1"	32	5	1.6	11	2.5	38.5	37	29.5
1¼"	38	5.5	1.7	12.5	2.5	47.8	46	38
1½"	42.5	5.5	1.7	13.5	2.5	52.8	52	44
2"	52	6	1.9	15.5	2.5	66	64	55

TECHNICAL DATA:

Maximum Working Pressure: 232PSI (16 Bar)

Temperature rating: -20°C to 180°C

Suitable Applications: Water, Oil, Gas

PERFECT SEALS as threads conform to BSPT-21 (ISO-7) standards

PEACE OF MIND ensured by visible branding on each product

PROVEN DURABILITY through robust construction